




minipack® - torre
Packaging machines and systems

SLEEVE WRAPPER MS 50 - 1

AUTOMATIC SLEEVE WRAPPER WITH 1 TRACK LOADING BELT AT 90° AND PNEUMATIC PUSHER

with 500 mm sealing bar

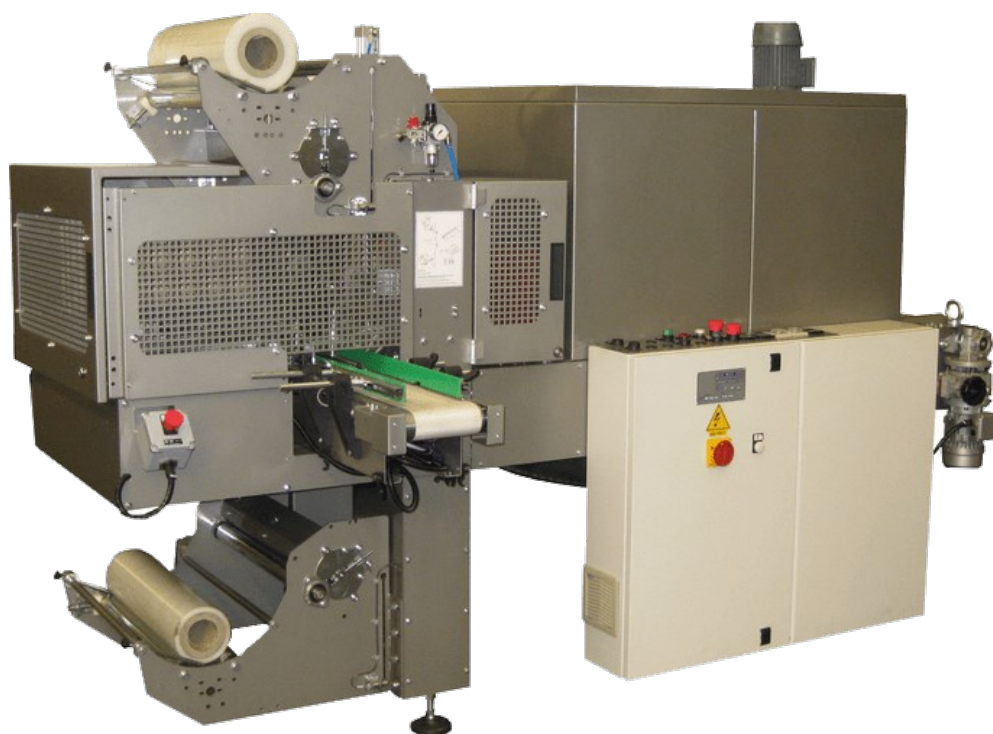

DESCRIPTION

The new series of **Minipack-torre** sleeve wrappers is characterised by the great versatility of the models offered combining efficiency, reliability and high performance.

The MS 50 - 1 sleeve wrappers are suitable for packaging different types of small-medium sized products (cans, water bottles, canned products, etc.) in flat heat-shrink plastic film. Thanks to the **90° loading belt**, the machine allows you to **group the products** for easier bundling.

The MS 50 - 1 model makes up to 10 packages per minute.

minipack®-torre S.p.A.

Sede legale - Via Provinciale, 54 - 24044 DALMINE (BG) Italy

P.IVA - C.F.: 01633550163 - Capitale sociale 619.200,00 i.v. - Reg. Imprese di Bergamo 01633550163 - REA n. 224151



minipack®- torre
Packaging machines and systems

TECHNICAL FEATURES

Power supply	V	220/400
Phase	ph	3
Electrical power	kW	10
Electric consumption	kWh	6
Air Pressure	bar	6
Air Consumption per cycle	nl	14
Hourly production	p/h (pph)	Up to 10 ppm
Sealing Bar	mm	500
MAX product height	mm	230
MAX reel dimensions	mm	Ø 300x480
Worktop height	mm	Standard 850+25
Machine dimensions	mm	2530x1200x h.1670
Tunnel infeed dimensions	mm	400x h.250
Tunnel chamber length	mm	1100
Machine weight	kg	750

minipack®-torre shall not be held liable for typos or printing errors in this catalogue. It also reserves the right to make changes to the specified features without prior notice. All trademarks are property of their respective owners and are hereby acknowledged.

MAIN FEATURES

- Feed belt arranged at 90°
- Pneumatic pusher with multi-row preassembly

minipack®-torre S.p.A.

Sede legale - Via Provinciale, 54 - 24044 DALMINE (BG) Italy

P.IVA - C.F.: 01633550163 - Capitale sociale 619.200,00 i.v. - Reg. Imprese di Bergamo 01633550163 - REA n. 224151



minipack® - torre
Packaging machines and systems

- Sealing bar with a film cutting blade (no smoke during the sealing step)
- Height of the worktop: 850 +/-25mm
- Photoelectric cell that blocks the sealing bar if it encounters an obstacle in its path
- Passage opening under the sealing bar 230 mm
- Automatic wrapping system of the film reels with dragging rollers
- Heat-shrinking film reels with max diameter 300 mm - thickness between 35 and 100 microns
- The temperature of the sealing bar and the tunnel is controlled by temperature-control devices
- Heat-shrinking tunnel insulated with rock wool and heated with resistors. Forced ventilation with air circulation
- Heat-shrinking tunnel Length 1100 mm with air circulation system
- Internal conveyor belt in the heat-shrinking Tunnel, driven by a gear motor with adjustable speed and featuring a thin steel mesh grate with side chains
- Switch to change the cycle from automatic to manual
- Installed power 10kW
- Average electricity consumption is reduced by about 40% during normal operation
- Air consumption 140 nl/min
- Pneumatic components that work with non-lubricated dry air
- Power supply: Option between 3phases 220V and 400V 3phases + N + T
- Machines compatible with Machinery Directive 2006/42/EC

minipack®-torre S.p.A.

Sede legale - Via Provinciale, 54 - 24044 DALMINE (BG) Italy

P.IVA - C.F.: 01633550163 - Capitale sociale 619.200,00 i.v. - Reg. Imprese di Bergamo 01633550163 - REA n. 224151