



minipack® - torre
Packaging machines and systems

TUNNEL 50 TWIN

DUAL-CHAMBER HEAT-SHRINKING TUNNEL - TUNNEL MOUTH 450X210 MM



DESCRIPTION

TUNNEL 50 TWIN has been designed to solve the needs to pack small product at high speed with great technical and esthetical results. Double heating chamber, double heating regulation, excellent thermal insulation, high speed belt and high speed shrink, great air flow control makes this **shrink tunnel** the perfect tool to solve any kind of shrink problem with the maximum efficacy.

TECHNICAL FEATURES

	200
--	-----

minipack®-torre S.p.A.

Sede legale - Via Provinciale, 54 - 24044 DALMINE (BG) Italy

P.IVA - C.F.: 01633550163 - Capitale sociale 619.200,00 i.v. - Reg. Imprese di Bergamo 01633550163 - REA n. 224151




minipack® - torre
Packaging machines and systems

Electrical power supply	V	208 220 400
Phase	ph	3
MAX power installed	kW	14 (200V) 15 (208V) 14 (220V) 14,5 (400V)
MAX product size	mm	400x190xL.(The maximum length depends on the shape, conveyor belt speed and type of film, etc.)
Machine dimensions	mm	2130x800x h.1460
Machine weight (Net/Gross)	kg	260/318
Tunnel infeed dimensions	mm	450x210

minipack®-torre shall not be held liable for typos or printing errors in this catalogue. It also reserves the right to make changes to the specified features without prior notice. All trademarks are property of their respective owners and are hereby acknowledged.

TECHNICAL DRAWING

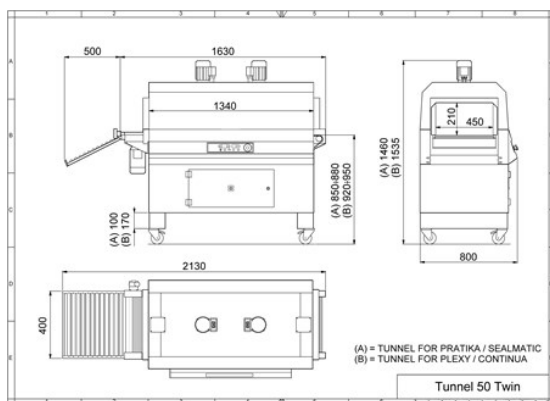

minipack®-torre S.p.A.

Sede legale - Via Provinciale, 54 - 24044 DALMINE (BG) Italy

P.IVA - C.F.: 01633550163 - Capitale sociale 619.200,00 i.v. - Reg. Imprese di Bergamo 01633550163 - REA n. 224151